


DIY Dock

User Manual

*Beyond
Power*

Dimension

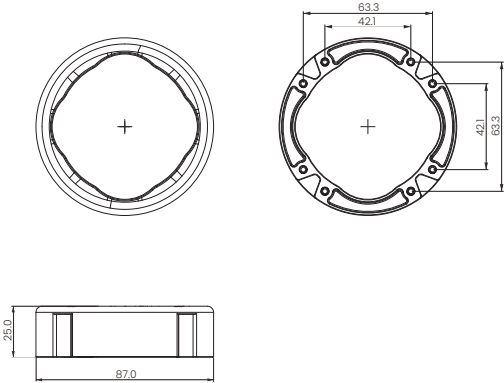

Unit: mm

In the Box



Dock X 1



Guide Plate X 3



Screwdriver X 1



Logo Plate X 1



M4X20 Screw X 10



DIY Dock User Manual

User Manual X 1

Additional Preparation




Center Punch
(5/64" or 2mm)



Hammer




Drill Bit
(5/32–11/64 inch
or 4–4.5mm)




Electric Drill

The above-mentioned tools need to be prepared by the user.


Installation




1. Adhere the guide plate to the base plate.




2. Mark the hole positions with a center punch.




3. Remove the guide plate and drill holes with an electric drill.





4. Secure the dock with screws and attach the logo plate.



Back

First tightening (pre-tightening)

Sequence 1:2:3:4:5:6:7:8

Second tightening (final tightening)

Sequence 8:7:6:5:4:3:2:1

ATTENTION

- Base Plate Requirements

Steel: Minimum 5mm thick (purchase M4 over 20mm screws if over 8mm)

Aluminum: Minimum 10mm thick (purchase M4 screws over 20mm separately)

Wood: Not recommended

- Drill Bit Size

Recommended: 5/32–11/64 inch (4–4.5mm)

- Torque Wrench

Recommended torque: 2.0–2.5 Nm

NOTICE

The Beyond Power DIY Dock is for customers customizing at their own risk. Use it carefully, follow instructions, and ensure third-party parts are reliable—you are fully responsible.

Beyond Power is not liable for any damage, injury, or issues from the DIY Dock or non-Beyond Power mounts. By using this product, you accept all risks. We also do not support or take responsibility for third-party businesses using the DIY Dock to create accessories or products.

Subscribe for more information



Copyright © 2025 Beyond Power Inc. All rights reserved.
Beyond Power, the Beyond Power logo, VOLTRA and AnyMount™ are trademarks of Beyond Power Inc., filed application in the U.S. and China.

Printed in China.